



Copy router for steel reinforcement profiles of pvc doors

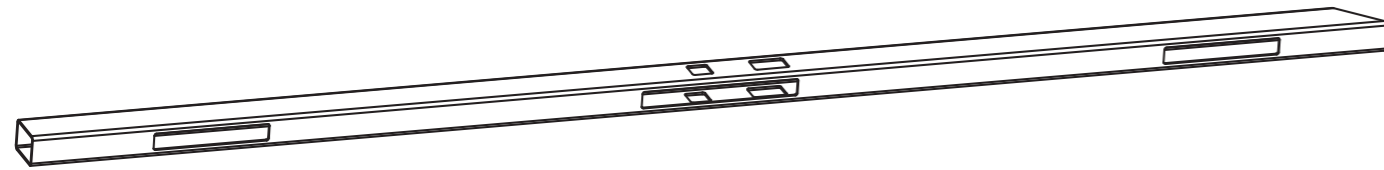

Wide range of copy templates (Exemples).

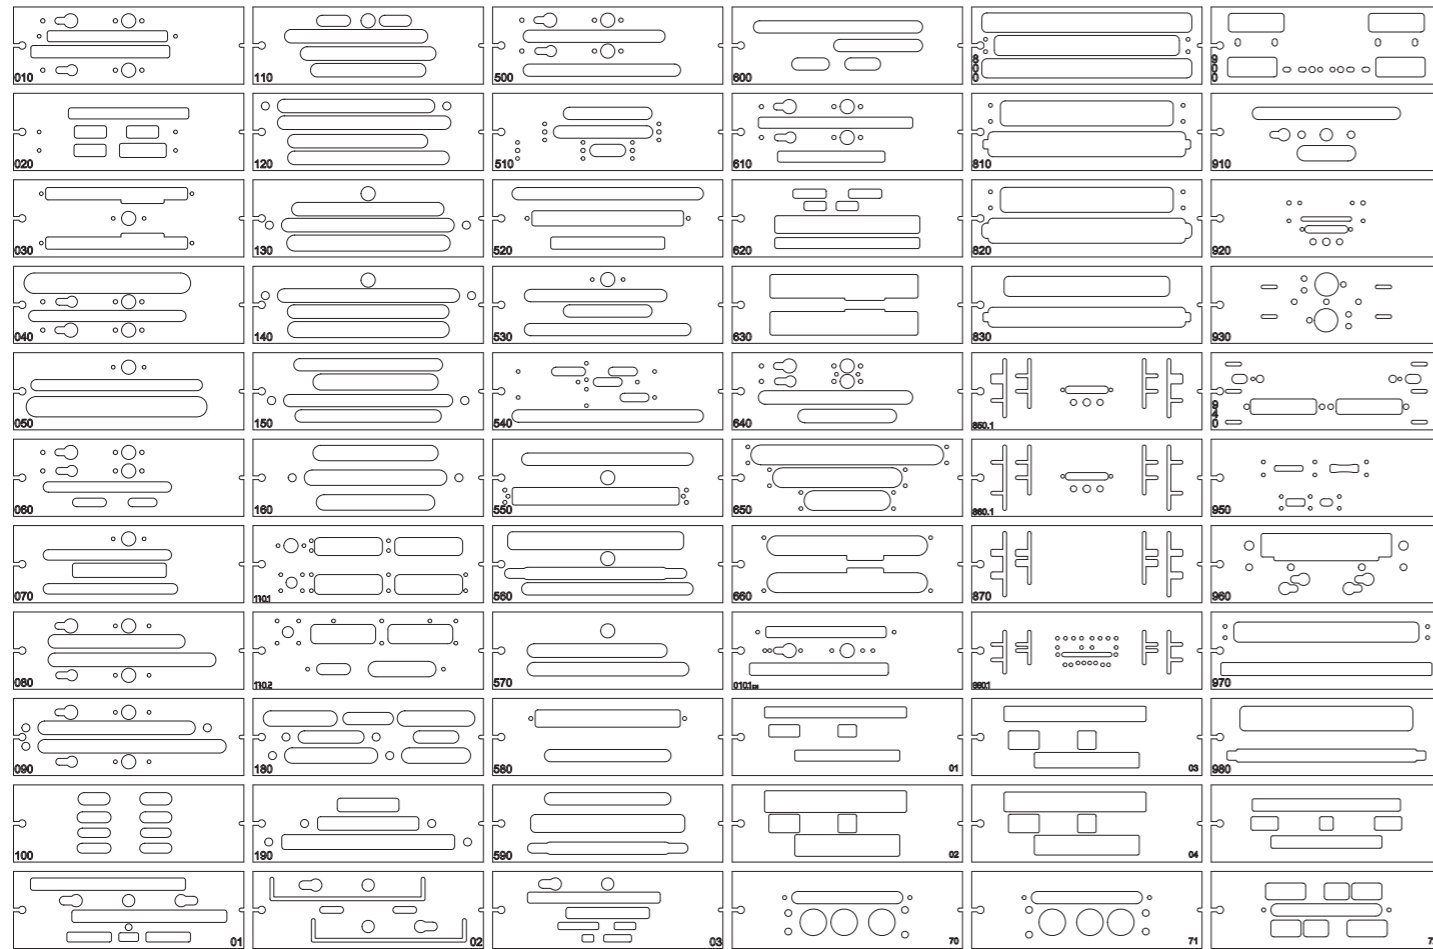

CE



A40sr
2.000/4.000rpm
A40sri
1.500÷8.400rpm



1,1kW



Collet CM2



3+T+N
400Volt



6÷8Bar




195
kg



1.200
1.000
2.150

110
140
340

The Company reserves the right to amend and improve its products without notice.

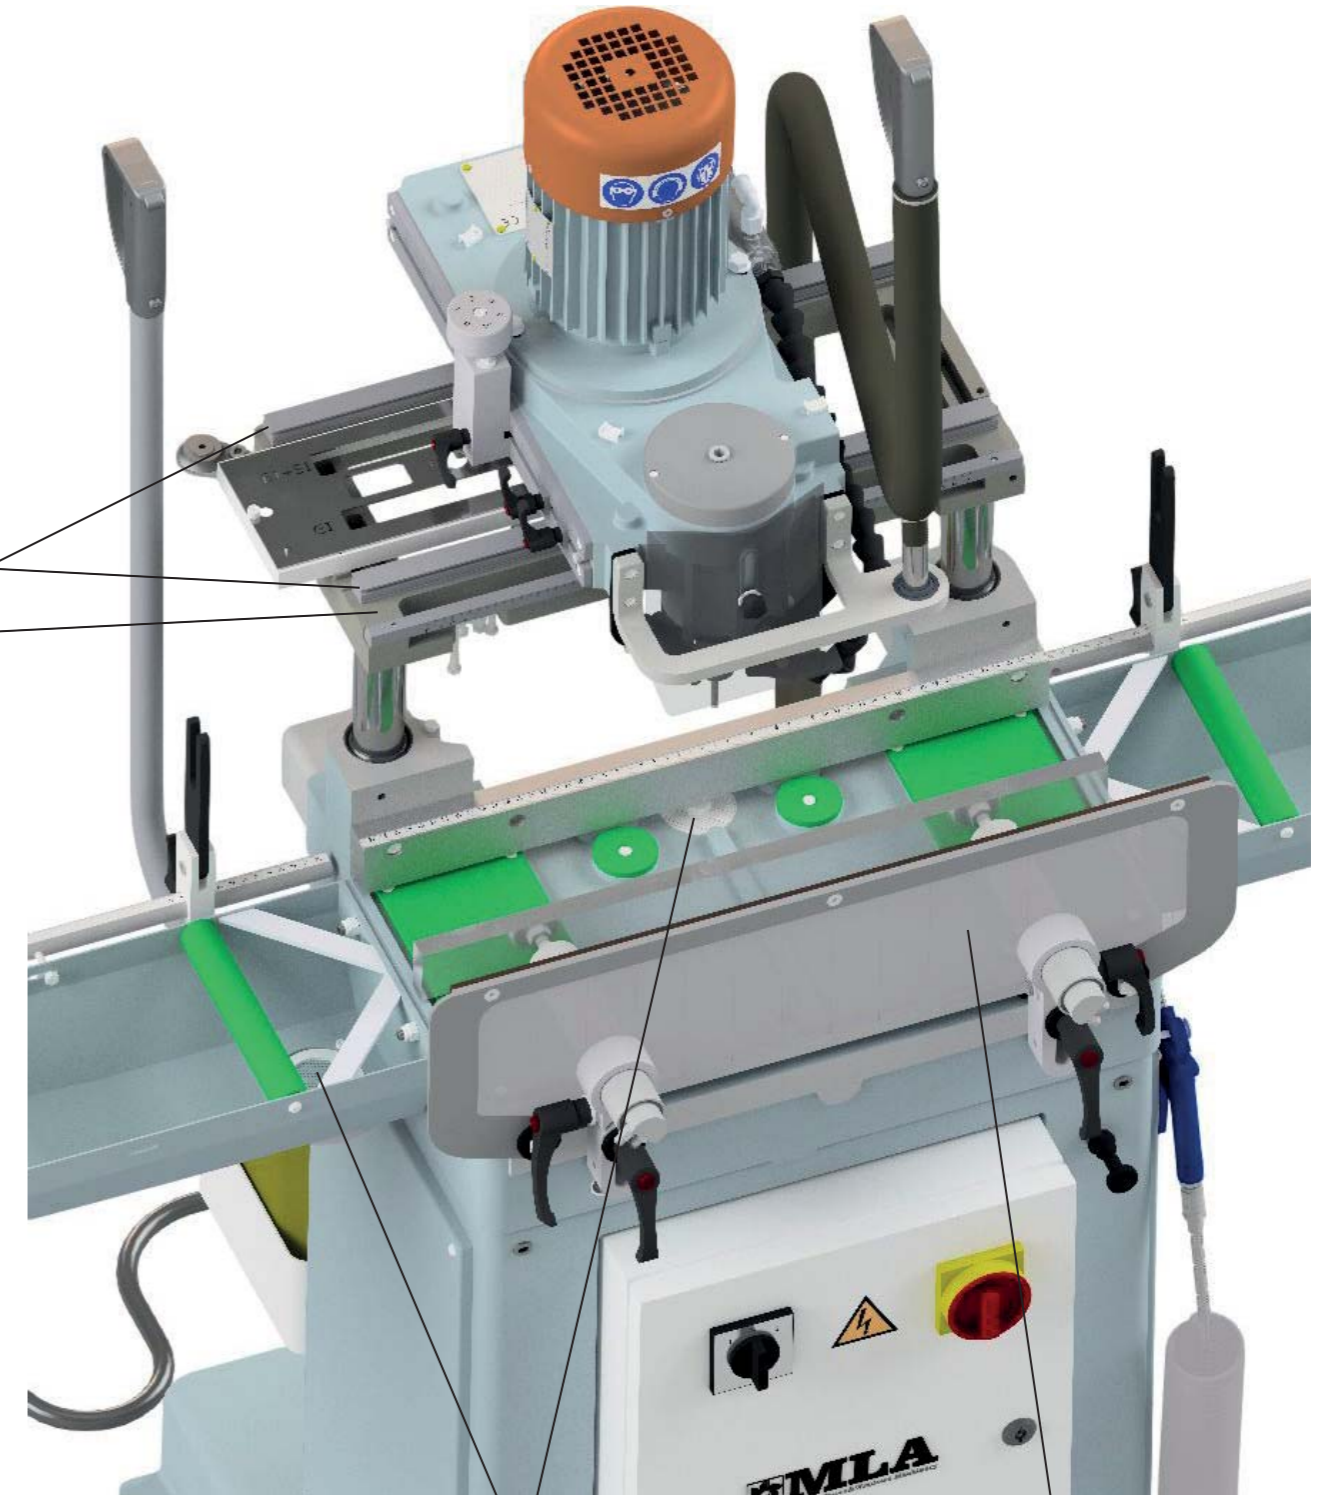

Linear rail guides (A, axis x and y) are fixed on a strong cast iron support (B), which enables the operator to work in a very stable way and without vibrations.

Coolant recovery openings filter the liquid and convey it back to the tank.

Plastic strips avoid the coolant dripping on the outside: the liquid is conveyed back onto the working table and then into the coolant recovery system.

Vertical descent stop button:
only the right lever must be
moved while milling.

Push button of the 5Ø
pneumatic copy pin
(4-5-6-8-10).

Special lever to
reduce the effort.

6+6 foldaway stops on the lateral supports
in 2 available lengths: 1 and 2m.

8 vertical descent stops
on the revolver.

Cold air gun

Variator of the motor rotation speed (A40sri):
you can choose the perfect speed according
to material and tool.
Different kinds of tool are supplied for
different kinds of work.
The motor is equipped with a thermic feeler
that stops the feeding in case of overheating,
protecting the integrity of the motor itself.

Functioning:
1) The profile is clamped at low pressure;
2) By pushing simultaneously the pneumatic buttons
placed on the handles of the right and left levers, the
high pressure clamping is activated and the mist
sprayers and motor are set in motion.
The bimanual control devices are certified and comply
with the safety regulations in force (EN574-3A).

A40sri - Code 104400sri + 502582L